

GREYSTONE ENERGY SYSTEMS INC


ROOM HUMIDITY/ TEMPERATURE TRANSMITTER HTRC Series



Precision humidity/temperature control/sensing

FEATURES:

- Highly stable RH sensor element
- Humidity range: 0-100%
- Accuracy available 2%, 3%, & 5%
- Choice of precision temperature sensors
- LCD display available
- Optional override, setpoint & fan speed control
- Field selectable outputs
- Custom logo available



*Peace of mind
through reliable
humidity/temperature
monitoring*

DESCRIPTION:

The HTRC Humidity/Temperature transmitter incorporates two sensors in one attractive wall mount enclosure for the most efficient environmental monitoring and control system. It uses a field-proven RH sensor to monitor relative humidity and a curve-matched thermistor to measure temperature and provides two analog outputs of either 4-20 mA, 0-5Vdc or 0-10 Vdc .

Additional options include an occupancy override button, a communication jack, a fan speed switch or a LCD display.

SPECIFICATIONS:

RH Sensor	Thermoset polymer based capacitive
Accuracy	±2, 3 or 5% RH from 5 to 95% RH
Range	0 to 100% RH non-condensing
Temperature Compensation	0° to 50°C (32°-122°F)
Hysteresis	± 3% RH
Response Time	15 seconds typical
Stability	±1.2% RH typical @ 50% RH in 5 years
Offset	±20% RH, programmable
Temperature Sensor	Curve-matched thermistor
Accuracy	±0.2°C (±0.4°F)
Range	0° to 35°C (32° to 95°F) or 0° to 50°C (32° to 122°F), programmable
Power Supply	24 Vac/dc ±10% (non-isolated half-wave rectified)
Consumption	60 mA max @ 24 Vdc
Input Voltage Effect	Negligible over specified operating range
Output Signal	4-20 mA active (sourcing), 0-5 Vdc or 0-10 Vdc
Output Drive @24 Vdc	550 ohm max. for current, 10K ohms min. for voltage
Output Resolution	10 bit PWM
Protection Circuitry	Reverse voltage protected and output limited
Operating Conditions	0° to 50°C (32°-122°F), 0-95% RH non-condensing
Programming/Selection	Via intenal push buttons and on-screen menu
Wiring Connections	Screw terminal block (14 to 22 AWG)
Enclosure Size	84mmW x 119mmH x 29mmD (3.3" x 4.7" x 1.15")

OPTIONS:

LCD DISPLAY

Range	00.0 to 99.9, 3 digit
Symbols	°C, °F, %RH
Display Size	38.1 x 16.5 mm (1.5" x 0.65")
Digit Height	11.43 mm (0.45")
Backlight	Enable/disable via menu

OVERRIDE

Type	Front panel, momentary push-button, 2 wire dry contact
Switch ratings	N.O., SPST, 50 mA @12 Vdc

FAN SPEED SWITCH

Type	Side panel mount, 5 position switch
Range	Off, Auto, Low, Medium, High
Signal	Resistance: 0, 2, 4, 6, 8 KΩ (Custom ranges available)

NETWORK COMMUNICATIONS

3.5mm phono jack	Ring/Mid/Tip connections to a 3-pin terminal block
------------------------	--


PRODUCT ORDERING INFORMATION:

MODEL	Product Description
HTRC	Room Humidity/Temperature Transmitter
CODE	RH Accuracy
2	2 %
3	3 %
5	5 %
CODE	LCD Display
N	Concealed
L	Viewable
CODE	Output
I	4-20 mA
V	0-5 Vdc or 0-10 Vdc (Jumper selectable)
CODE	Options (Multiple selections may be made)
S	Override switch (Includes occupied input)
C	Communication jack (3.5 mm phono)
F	Fan speed switch

HTRC	3	N	I	-	-	← Typical Model Number
------	---	---	---	---	---	------------------------

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



PCB/WIRING INFORMATION

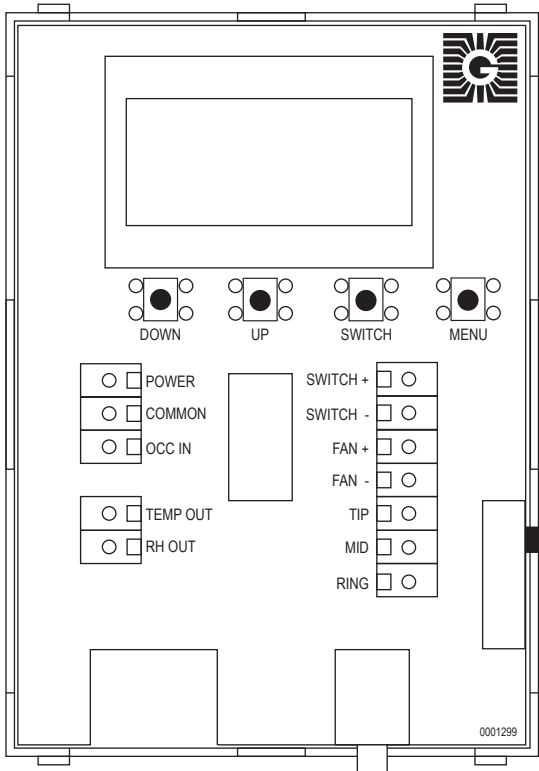

Terminal	Function
POWER	From +24 Vac/dc of controller or power supply
COMMON	To GND or COMMON of controller
OCC IN	To digital output of controller
TEMP Output	To analog input of controller 4-20 mA or 0-5 Vdc or 0-10 Vdc
RH Output	To analog input of controller 4-20 mA or 0-5 Vdc or 0-10 Vdc
SWITCH +	To digital input of controller
SWITCH -	To GND or COMMON of controller
FAN +	To analog input of controller Resistance input
FAN -	To GND or COMMON of controller
TIP	External Jack TIP (tip of plug) connection
MID	External Jack MID (middle of plug) connection
RING	External Jack RING (base of plug) connection

* Some models do not have all these features
 **To save on number of connection wires, all GND or COMMON may be connected together.
 ***Illustration shows standard wiring configuration. Custom configurations are available. Please contact Greystone.

DIMENSIONS:

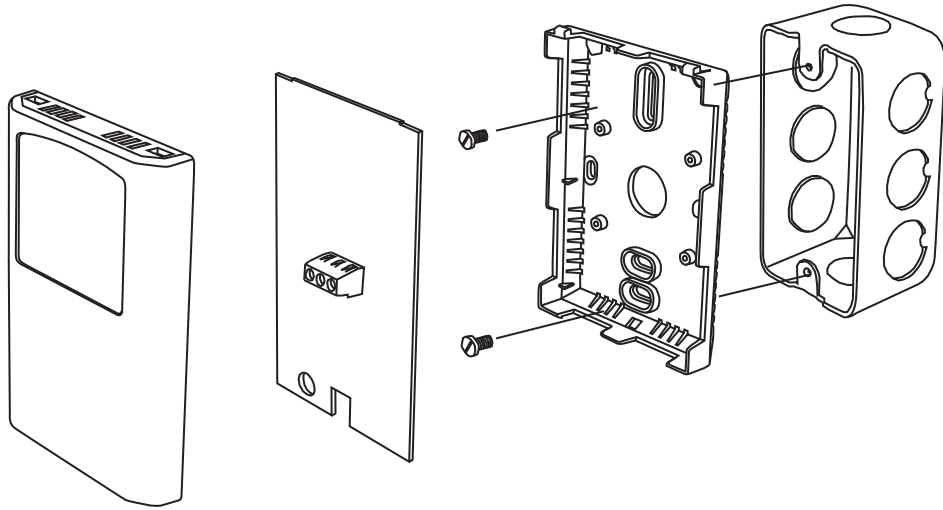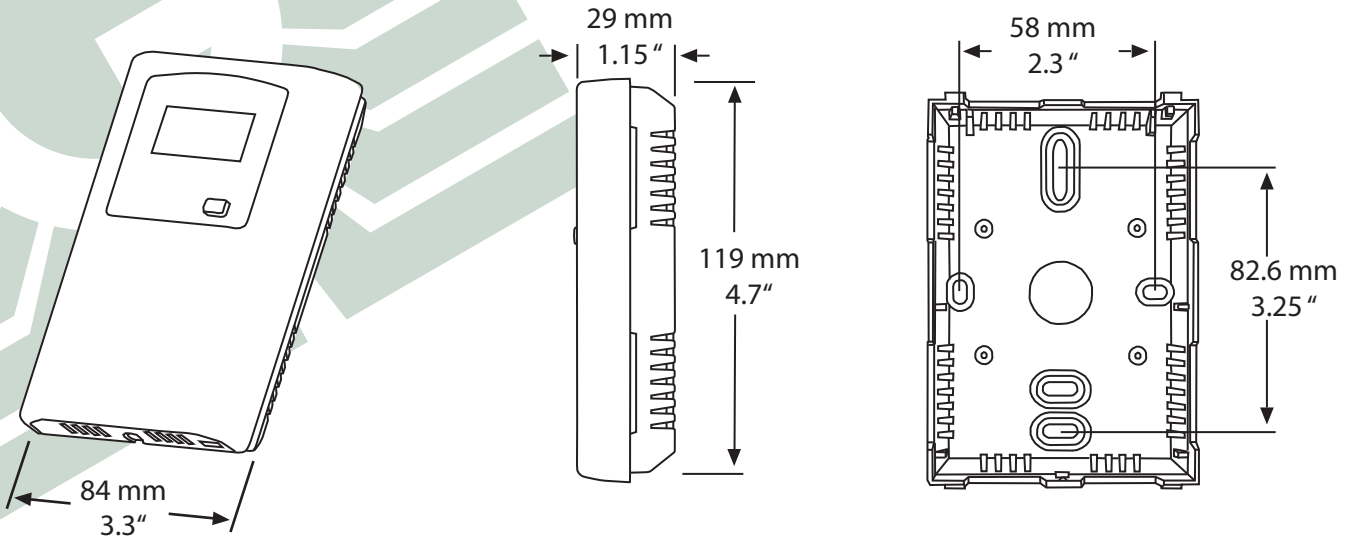

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



GREYSTONE

ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.
 150 English Drive, Moncton,
 New Brunswick, Canada E1E 4G7
 (506) 853-3057 Fax: (506) 853-6014
 North America: 1-800-561-5611
 e-mail: mail@greystoneenergy.com
 www.greystoneenergy.com

RoHS
COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM