GAUGE PRESSURE TRANSMITTERS PGS Series




Precision pressure control/sensing

FEATURES:

- 1/4" NPT
- NIST traceable calibration
- Weather resistant for harsh environments
- Fast response time
- Capacitance sensing element
- Ranges -14.7 through 10,000 PSIG (-101.4 through 68947.6 kPa)
- Accuracy to ±0.25% FSO

- DC inputs, current output
- Compensated temperature range: -20°C to 80°C (-4°F to 176°F)
- Operating temperature range: -40°C to 85°C (-40°F to 185°F)
- 17-4PH Stainless Steel has excellent corrosion resistance (comparable to grade 304 stainless)



Peace of mind through reliable pressure transmitters


APPLICATIONS:

- HVAC Systems
- Energy Management Systems
- Steam Pressures
- Refrigerants and Ammonia
- Gas Chromatography
- Paint Spraying Systems
- Electronic Pressure Switch
- Heat Pumps
- Hydraulic Systems
- Irrigation Systems
- Compressor Control
- Propane


PRODUCT DESCRIPTION:

PGS100A is a compact gauge pressure transmitter complete with a 2 wire 4-20mA output, various pressure ranges, 1/4" NPT connecton and 2 foot cable for electrical termination.

SPECIFICATIONS:

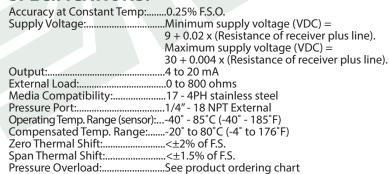

OUTLINE DRAWING:



MEDIA COMPATIBILITY:

The PGS100 Series transmitters are designed to be used with any gases or liquids compatible with 17-4PH stainless steel. The 17-4PH stainless has excellent corrosion resistance. Corrosion tests and service experience have shown that in all aged conditions it is superior to standard hardenable stainless grades such as 420, 431 and 410 stainless. This corrosion resistance is comparable to 304 stainless. Note it is not recommended for hydrogen applications.

PRODUCT ORDERING INFORMATION:

MODEL	Product Description
PGS100A	Gage Pressure Transmitter

CODE	Pressure Ranges	Proof Pressure (PSI)	Burst Pressure (PSI)
4A1A	-14.7-15 PSIG (-101.4-103.4 kPa)	20	500
5A1A	-14.7-30 PSIG (-101.4-206.8 kPa)	50	500
6A1A	-14.7-60 PSIG (-101.4-413.7 kPa)	100	750
7A1a	-14.7-100 PSIG (-101.4-689.5 kPa)	200	1000
8A1A	-14.7-150 PSIG (-101.4-1034.2 kPa)	400	2000
9A1A	0-10 PSIG (0-68.95 kPa)	20	500
10A1A	0-25 PSIG (0-172.4 kPa)	50	500
11A1A	0-50 PSIG (0-344.7 kPa)	100	750
12A1A	0-100 PSIG (0-689.5 kPa)	200	1000
13A1A	0-150 PSIG (0-1034.2 kPa)	400	2000
14A1A	0-200 PSIG (0-1379 kPa)	400	2000
15A1A	0-250 PSIG (0-1723.2 kPa)	500	2000
16A1A	0-300 PSIG (0-2068.4 kPa)	500	2000
17A1A	0-500 PSIG (0-3447.4 kPa)	1000	3000
18A1A	0-1000 PSIG (0-6894.8 kPa)	2000	5000
19A1A	0-5000 PSIG (0-34473.8 kPa)	7500	10,000
20A1A	0-10,000 PSIG (0-68947.6 kPa)	12,500	20,000

PGS100 4A1A

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



GREYSTONE

ENERGY SYSTEMS INC

Greystone Energy Systems, Inc. 150 English Drive, Moncton, New Brunswick, Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014 North America: 1-800-561-5611 e-mail: mail@greystoneenergy.com www.greystoneenergy.com



largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leadingedge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.